

16"/20" Composite Slickline Floor Sheave



Spring loaded / positive side locking pins




Cable shrouds reduce "line jump"

The Wireline Technologies, Inc. 16" and 20" Slickline Sheave feature a lightweight composite wheel, high strength aluminum and stainless steel structural components, and a simple side loading system that provides easy line placement. Incorporation of cable shrouds above the wheel prevents the line from "jumping sheave." Side locking design provides in-

- Solid wheel and available handguard for added safety
- Side loading system for ease of use
- Cable shrouds reduce "line jumping"
- Composite wheel is less abrasive to expensive lines
- One year manufacturers warranty
- Fully certified (Certificate supplied)

- Weight- 20 lbs. (16"), 23 lbs. (20")
- Height- 26" (16"), 30" (20")
- Width- 4"
- SWL- 6,000 lbs. (3,000 lbs. line)
- Proof test load- 12,000 lbs. (6,000 lbs. Line)
- Standard line sizes- .092"-.108" & .108"- 125"
(Custom grooving is available)

Wireline
Technologies

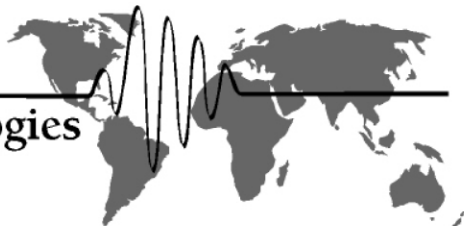

2140 North Redwood Road, #60
Salt Lake City, Utah, 84116 U.S.A.
Phone (801) 323-5533
Fax (801) 323-7033
wtisheave.com