


32" & 36" Composite Rigging Sheave

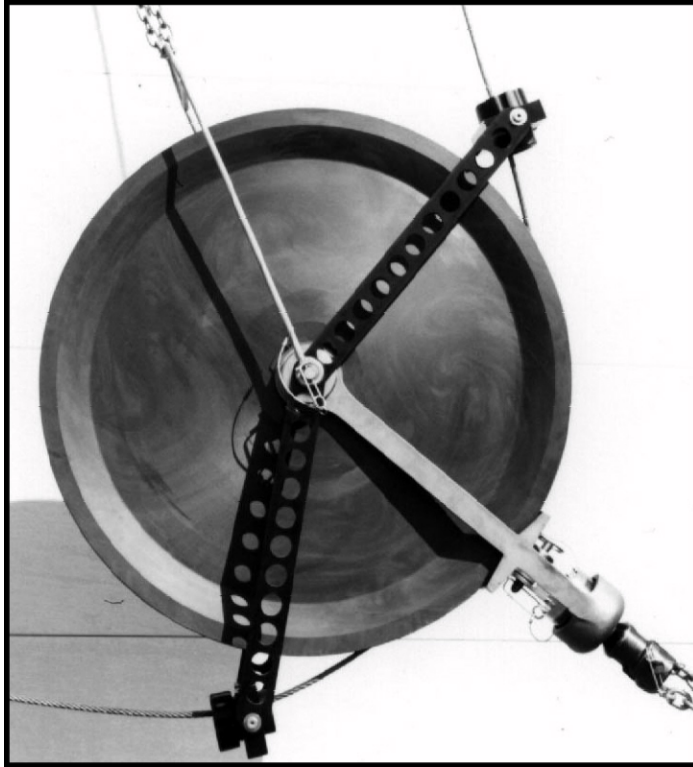


Utilization of advanced materials and fabrication techniques, as well as close communication with industry leaders, has resulted in a rigging sheave assembly that sets a new standard for deep well operations. This sheave's completely sealed bearing system reduces maintenance to periodic cleaning (pressure washing) and visual inspection. Rigorous testing has proven the design to be capable of withstanding the most severe applications and environments.

- Completely sealed bearing system
- Non-sparking 'spokeless' composite wheel
- All corrosion resistant materials
- Side loading gate system
- Available handguard/pinch protector
- One year manufacturers warranty
- Fully certified (Certificate supplied)

- Weight- 140 lbs. (32"), 170 lbs. (36")
- Height- 56" (32"), 60" (36")
- Width- 7"
- SWL- 40,000 lbs. (20,000 lbs. line)
- Proof test load- 80,000 lbs. (40,000 lbs. Line)
- Standard line sizes- 15/32", 1/2", 17/32"
(Custom groove sizes are available)

Wireline
Technologies

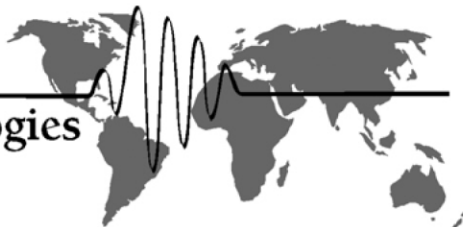

2140 North Redwood Road, #60
Salt Lake City, Utah, 84116 U.S.A.
Phone (801) 323-5533
Fax (801) 323-7033
wtisheave.com