



# “G2” Sealed Bearing Rigging Sheave

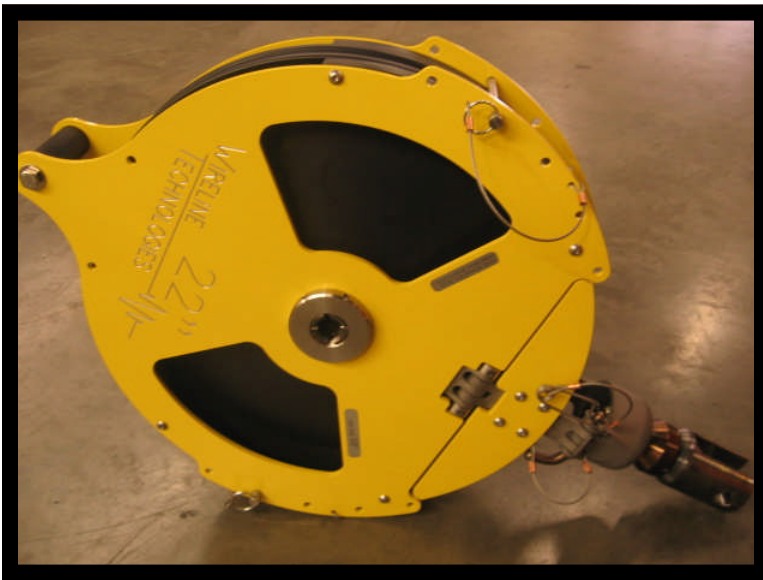

- Completely sealed bearing system.
- A safety yellow cover protects hands and fingers.
- Cable shroud reduces the possibility of “line jumping”.
- Composite wheel is less abrasive to expensive lines
- Available handguard/pinch protector
- One year manufacturers warranty
- Fully certified (Certificate supplied)

The Wireline Technologies, Inc. G2/Generation Two Sealed Bearing Rigging Sheave incorporates a completely sealed bearing system. This system reduces the maintenance of the sheave to periodic cleaning (pressure washing) and visual inspection. Re-greasing is recommended at annual re-certification only. Rigorous testing has proven the design to be capable of withstanding the most severe applications and environments.

They are available 17”, 22” and 26” diameter wheel sizes.


#### Design criteria include:

**Safety**– Yellow cover and available handguard/pinch protector.

**Lightweight**- Composite wheel and stainless steel components reduces weight by 40% over competition.

**Easy Use**- Lighter weight, built in handle, side loading gate and choice of five clevis styles provides easier use.

Sheave Size	17"	22"	26"
Wireline Diameter	Up to 5/16"	Up to 3/8"	Up to 17/32"
Width	5.5"	5.5"	5.5"
Height	33"	37"	41"
Weight	49 lbs.	70 lbs.	90 lbs.
Maximum SWL	20,000 lbs.	25,000 lbs.	29,000 lbs.
Proof Test Load	40,000 lbs.	50,000 lbs.	58,000 lbs.

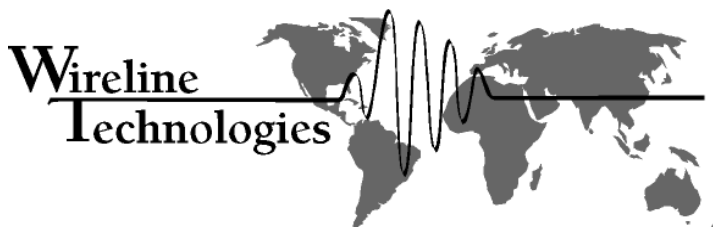

2140 North Redwood Road, #60  
 Salt Lake City, Utah, 84116 U.S.A.  
 Phone (801) 323-5533  
 Fax (801) 323-7033  
[wtisheave.com](http://wtisheave.com)