

Slickline Stuffing Box Sheave Bracket




The Wireline Technologies, Inc. Composite Slickline Stuffing Box Sheave Bracket is available in both 16" and 20" versions. Features include a lightweight composite wheel, high strength aluminum and stainless steel structural components, and a patented top loading system that allows for easy line placement and prevents the line from "jumping sheave."

The unique modular cast/plate frame design provides superior rigidity, reducing flex at high tensions. This decreases line and packing wear caused by misalignment.

- Solid wheel for increased safety
- Patented top-loading system for ease of use
- Unique "shoes" eliminate "line jumping"
- Composite wheel is less abrasive to expensive lines
- One year manufacturers warranty
- Fully certified (Certificate supplied)
- Sealed tapered roller bearings

- Weight- 30 lbs. (16"), 35 lbs. (20")
- Height- 31" (16"), 35" (20")
- Width- 5"
- SWL- 6,000 lbs. (3,000 lbs. line)
- Proof test load- 12,000 lbs. (6,000 lbs. Line)
- Standard line sizes- .092"-1.08" and .108"-1.25"
(Custom grooving is available)

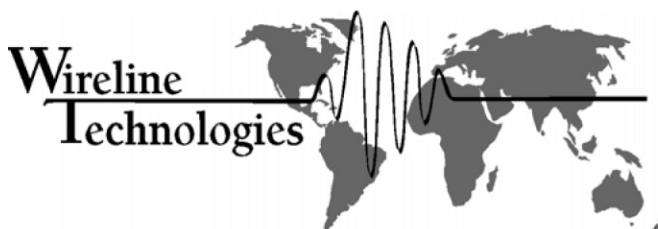

2140 North Redwood Road, #60
Salt Lake City, Utah, 84116 U.S.A.
Phone (801) 323-5533
Fax (801) 323-7033
wtisheave.com